




# **P** series

Compact, high-output, point-source  
loudspeaker and sub-bass cabinet





# The point-source loudspeaker perfected

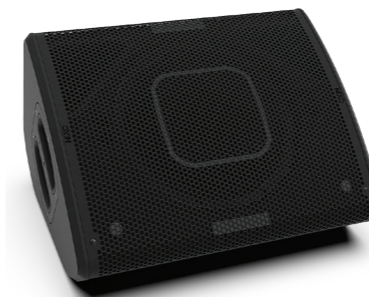

*P12 can be deployed as a uniquely versatile wedge monitor*

Building on NEXO's acclaimed expertise in compact, high-output, point-source loudspeakers, the P12 delivers pristine, full-range sound at even greater Sound Pressure Levels, along with unparalleled versatility, thanks to an ingenious system for varying HF coverage patterns.

An exciting synergy of sleek good looks and stunning performance, the P12 employs a custom 12-inch LF driver and 3-inch diaphragm HF driver in a coaxial configuration to deliver perfect phase alignment, exceptional clarity and a smooth response across the full frequency range. Available in mobile and install versions, the curved, low profile cabinet can be deployed both vertically or horizontally (as a wedge monitor), and features pole-mounting hardware and rigging points, along with Active/Passive switching.



*Active / Passive switching*

The L15 sub is an ideal partner for the P12, extending LF performance down to 40Hz, while NEXO's NXAMP4X2MK2 delivers the perfect power and processing solution, combining multi-channel, high powered, networkable amplification with sophisticated loudspeaker control and protection. Linear phase presets for P12/L15 and the full range of NEXO cabinets make it quick and easy to configure a 'Plug & Play' solution for any system.

With the P12, musicians, DJs and event organisers can expect extraordinary performance from a compact system, while production and rental companies look set to enjoy the industry-leading levels of return on investment upon which the reputation of NEXO point-source loudspeakers are built.



*The L15 sub extends LF response down to 40Hz*




138dB Peak SPL (Passive Mode)



Variable HF Directivity



Low-Profile Cabinet



Coaxial 12" LF/ 3" Diaphragm HF Driver



Active/Passive Switching



Touring/Install Versions

# Variable HF Directivity


A few moments is all it takes to optimise the P12 for your application




## Optional Magnetic Flanges

The dispersion characteristics of the P12 can be changed in seconds through the addition of optional magnetic flanges. The standard cabinet uses a 60° x 60° horn with additional 90° x 40° and Asymmetrical (PS Type) 60° - 100° x 40° also available.


The NXAMP4X2MK2 powered controller provides dedicated presets for each configuration, ensuring optimised coverage at any frequency. Results are even better in Active mode, where the crossover frequency can be adapted to offer the best coverage.



Standard Horn Profile  
60° x 60° Dispersion



90° x 40° Horn Flange  
Rotatable

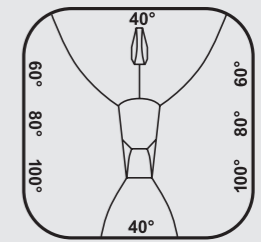


Asymmetrical (PS Type)  
60° to 100° x 40° Dispersion

## Advanced cabinet design with quick-release steel grille

Changing the flanges is easy and requires no tools – the quick-release steel grille can be removed in seconds providing full access to the horn.

With a fully symmetric design, there are no left or right versions of the P12, so inventory requirements are significantly streamlined. The cabinet is built around a 15mm custom-profiled plywood shell, using poplar veneer for the inner layers and birch on the outside to ensure strength, rigidity and light weight. Bass-reflex tuning is achieved through two computer-optimised ports to deliver ultra-low distortion, even at very high output levels.

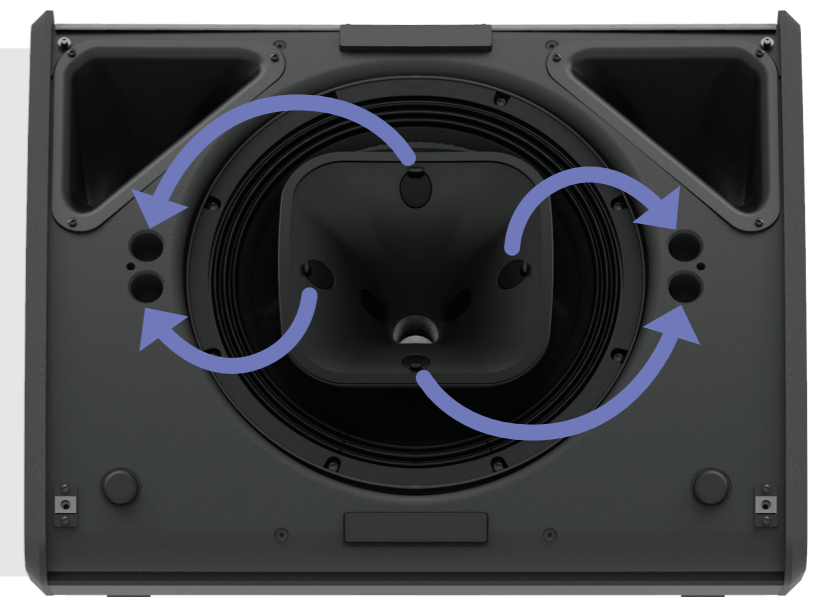


# Bringing precision, high-output performance to a range of fixed and mobile applications


The facility to change the HF directivity makes the P12 an extremely flexible speaker in a range of mobile and fixed applications. But it's when deployed as a wedge monitor that the P12 becomes uniquely versatile, as sound engineers and rental companies can quickly 'tune' the HF coverage to suit the musician: Wide for guitarists or narrow for brass sections, while a P12 on an L15 sub creates a perfect drum fill monitor.



DJ

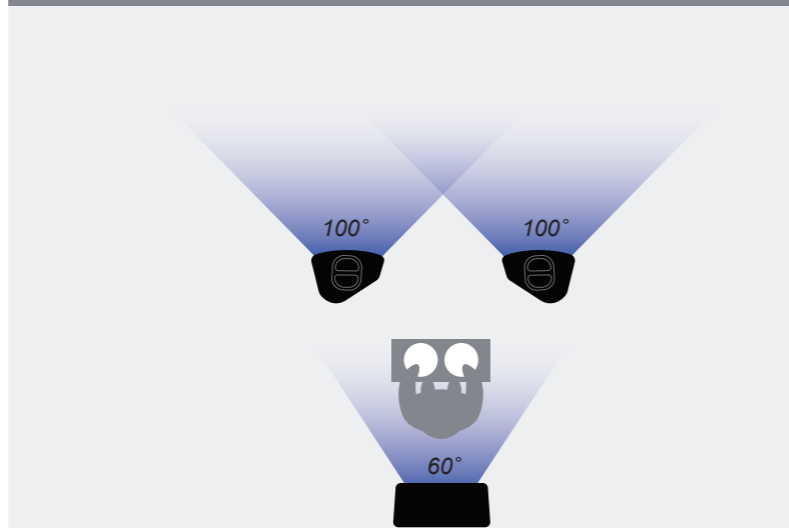


Small Club: 2 x P12 with 'PS Horn' for FOH, 1 x PS12 with standard horn for monitor

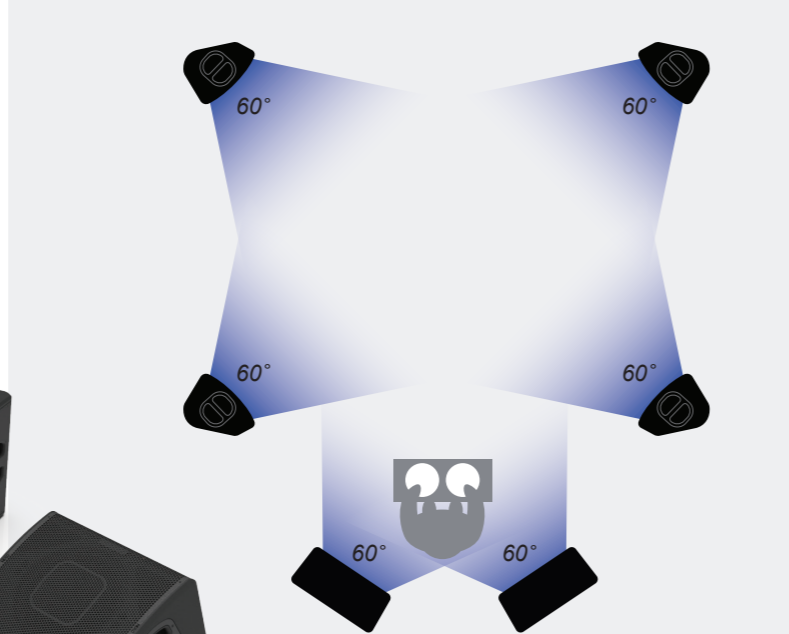

Large Club: 4 x P12 located in each corner of the room, with 2 x P12 as monitors – all standard horns




Music

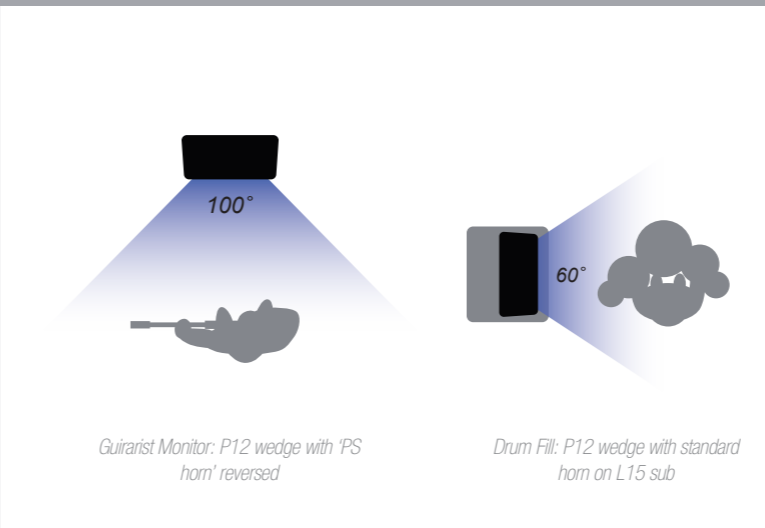

Guitarist Monitor: P12 wedge with 'PS horn' reversed

Drum Fill: P12 wedge with standard horn on L15 sub

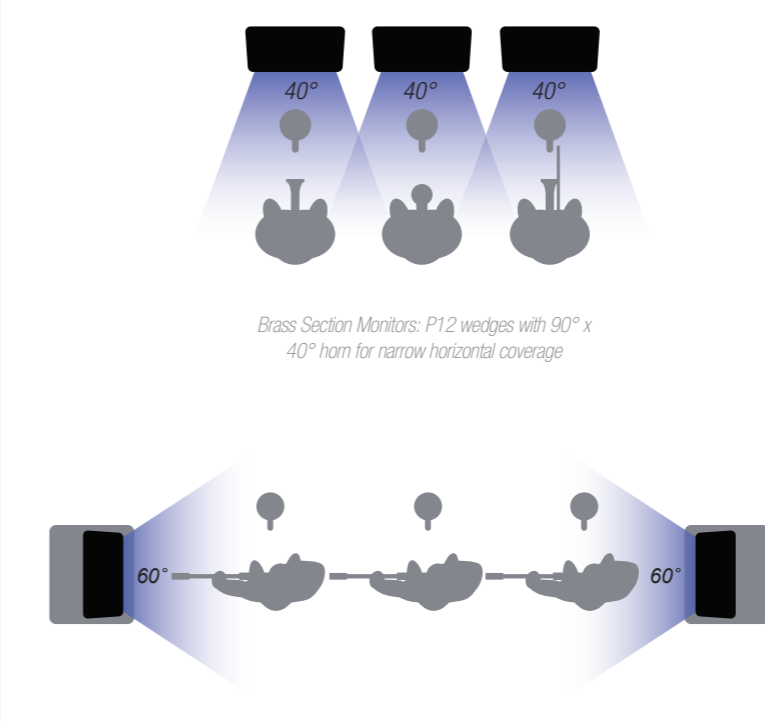


Brass Section Monitors: P12 wedges with 90° x 40° horn for narrow horizontal coverage


Side Fills: P12 wedges (standard horn) on L15 subs on each side



Events

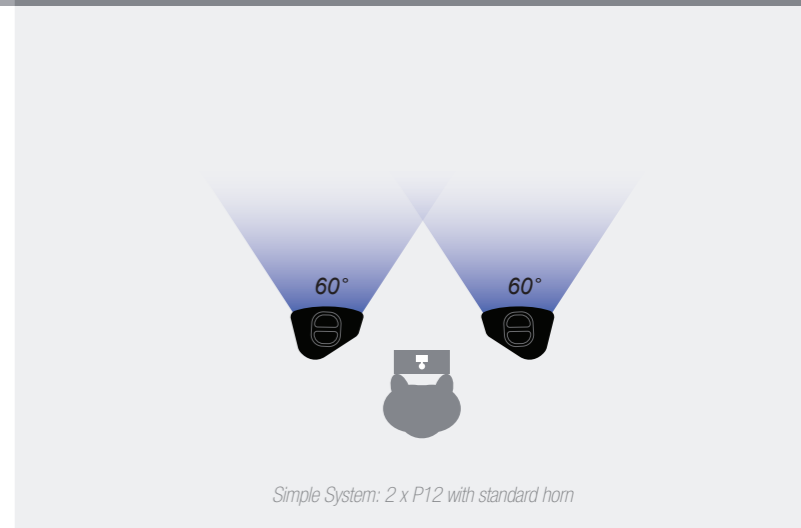

Simple System: 2 x P12 with standard horn

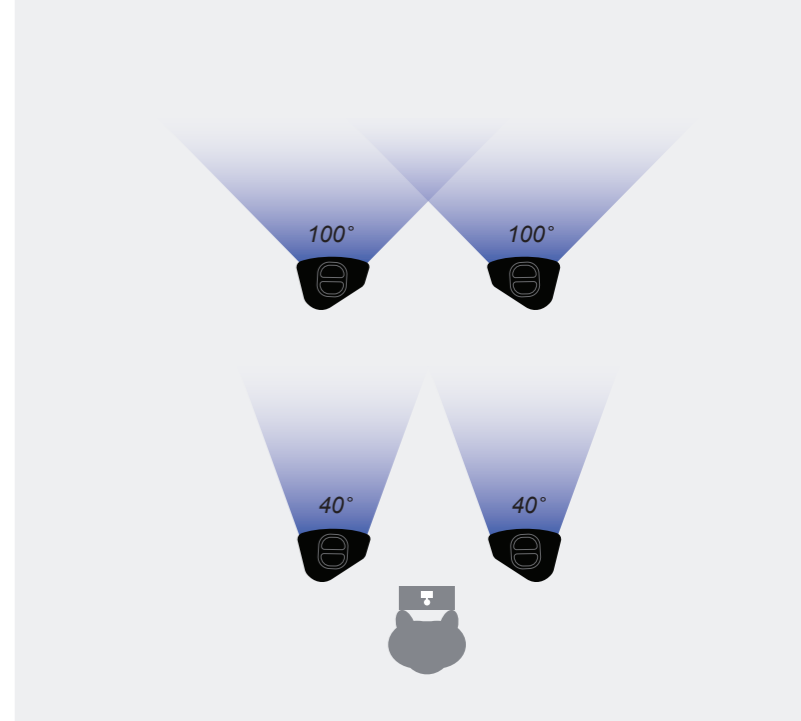


Long Throw System: 2 x P12 + 2 x P12 delayed – all with 'PS horn'




# Recommended systems

NXAMP4X2MK2 delivers the perfect power and processing solution for P12/L15 systems in a variety of configurations


NXAMP4X2MK2

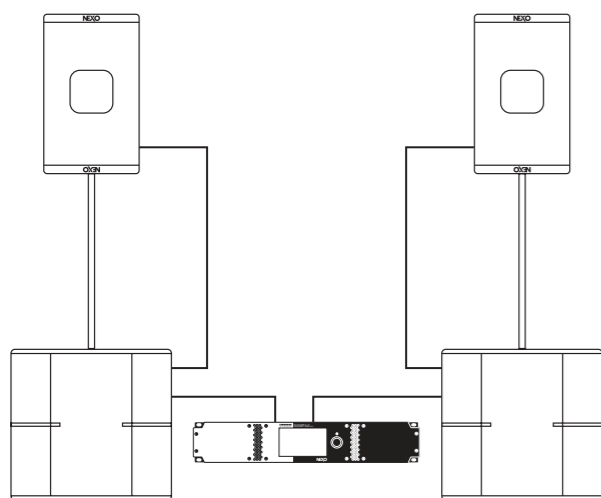


Stereo System: 1 x P12 (Passive) with pole stand on 1 x L15 Sub per side

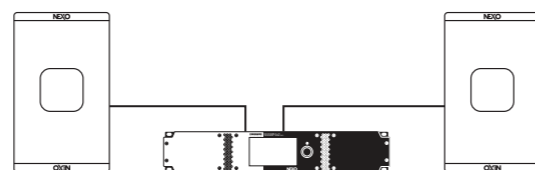


Active System: Stereo, 1 x P12 (Active) per side

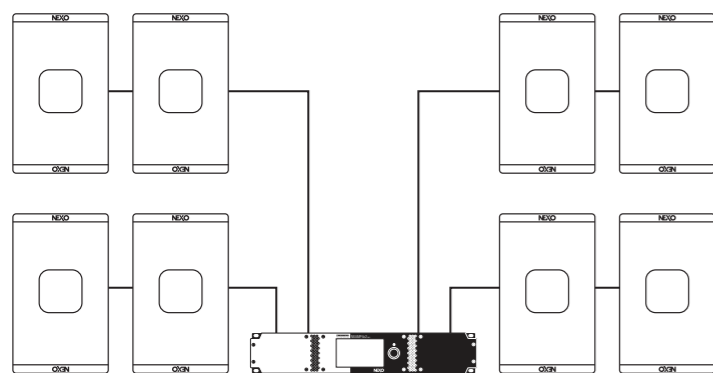

Distributed System: 8 x P12 (Passive) – 2 per amplifier channel

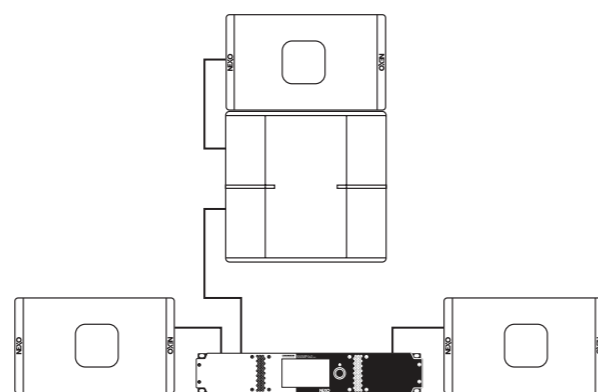

Monitor System: 1 x P12 Wedge on 1 x L15 Sub (Drum Fill) + 2 x P12 Wedges

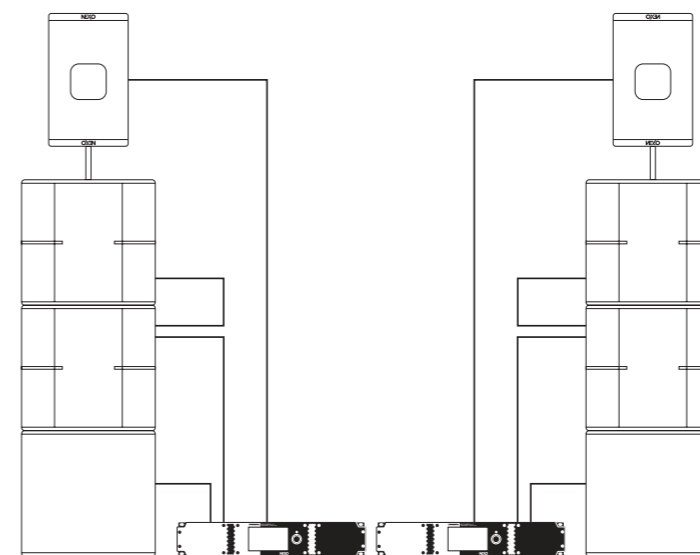

Mid-Sized FOH System: (Per side) 1 x P12 (Active) on 2 x L15 Subs on 1 x L15 Sub (Cardioid Mode)

## NXAMP4X2MK2: The perfect power and processing partner

Rated at 4 X 2500 Watts, the NXAMP4X2MK2 combines advanced signal processing with four state-of-the-art Class D amplifiers to create a flexible, light-weight powering and control solution that's perfect for use with P12/L15 systems. Easy to set up and quick to deploy, all essential parameters are readily accessible via a large colour touch-screen on the front panel, with a comprehensive range of control and networking facilities on the rear panel. 32-bit/96KHz converters and 64-bit signal processing combine to assure pristine sound quality.



\*optional

# P12

Measuring 432mm wide x 531mm high x 317mm deep and weighing 20Kg, the P12 can be deployed in vertical or horizontal (wedge monitor) configurations, with HF directivity set to match the specific application. P12 features Active/Passive switching with cabinets available in mobile and installation versions.



P12 cab in main (vertical) and wedge (horizontal) configurations

## Specifications

P12 with NEXO electronics	
Frequency Response (+6 dB)	60 Hz - 20 kHz
Peak SPL Level (1m)	138dB Peak (Passive mode) / 140dB Peak (Active mode)
Operating Voltage	55Vrms (150Vpeak)
HF Dispersion (according to horns)	60°x60° - 90°x40° - Asymmetrical Dispersion 60° to 100°x40°
Crossover Frequency	60 Hz - 85 Hz
Nominal Impedance	Active mode (8Ω LF, 8Ω HF) – Passive mode: 8Ω
Product Features	
Components	LF: 1x12" - 8Ω; HF : 1x3" - 8Ω - Neodymium driver
Material	Baltic birch / Poplar plywood
Finish	Black or white structural paint
Front Finish	Steel front grille + Back mesh
Fittings	Handle on both sides Threated inserts on the back and on both sides for connection of mounting accessories Stand fitting on both sides (35mm / 1"3/8)
Connector	4x NL4, 4 poles connectors; 2 on the back and 1 on both sides
Weight	20 kg / 44 lb
Height x Width x Depth	531mm x 432mm x 317mm (20.9" x 17" x 12.4")

# L15

Measuring 650mm wide x 430mm high x 550mm deep and weighing 34Kg, the L15 sub employs a 15" long excursion driver in Baltic birch / poplar plywood cabinet with threaded inserts for mounting accessories and an M20 stand fitting.




L15 sub

## Specifications


L15 with NEXO electronics	
Frequency Response (+6 dB)	40 Hz - 120 Hz
Peak SPL Level (1m)	139 dB Peak
Operating Voltage	55Vrms (150Vpeak)
Crossover Frequency	85 Hz - 120 Hz
Nominal Impedance	4Ω
Product Features	
Components	1x 15" - 4 ohms - Long excursion - Neodymium driver
Material	Baltic birch / Poplar plywood
Finish	Black or white structural paint
Front Finish	Steel front grille
Fittings	Handles on both sides Threated inserts on both sides for connection of mounting accessories Stand fitting M20
Connector	2x NL4, 4 poles connectors
Weight	34 kg / 75 lb
Height x Width x Depth	430mm x 650mm x 550mm (16.9" x 25.5" x 21.6")

# P12/L15 System Accessories


A full range of accessories is available for varying P12 HF directivity and for deploying P12/L15 in mobile and fixed applications.




**PNT-P12HORN9040**  
HORN Dispersion Adapter. 90° - 40°




**PNT-P12HORNPS**  
HORN Dispersion Adapter. PS




**PNI-CLADAPT**  
Ceiling Adapter, use with HBRK12/VBRK12




**PNI-WM330**  
Wallmount L Bar for P12, with WMADAPT




**PNT-HBRK12**  
Horizontal Cradle, use with CLADAPT, PLADAPT




**LNT-HBRK15**  
Horizontal Cradle for L15



**PNT-BUMP**  
LiftBar for P12, use with P12, WMADAPT




**PNT-PLADAPT**  
Pole Stand Adapter, use with P12, HBRK12, VBRK12




**PNT-VBRK12**  
Vertical Cradle, use with CLADAPT, PLADAPT



**PNT-WMADAPT**  
Wall Mount Adapter for PLUS series



**LNT-WB15**  
Wheelboard for L15

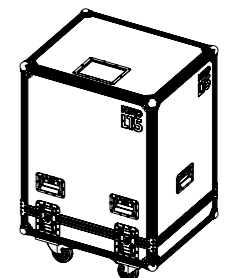

**LNT-2CASE15**  
Flight case for 2x L15

# P series

## P12 L15

### NEXO

Parc d'Activité  
du Pré de la Dame Jeanne  
B.P.5  
60128 Plailly  
FRANCE  
Tel: +33 (0)3 44 99 00 70  
Fax: +33 (0)3 44 99 00 30  
E-mail: info@nexo.fr



ISO 9001:2015  
BUREAU VERITAS  
Certification



<https://nexo-sa.com>

Thinking. Inside the box.

# NEXO